



Padding sofas system of the Deep collection

## Versions

---

Armchair  
2 seater sofa

## Internal Structure and Tires

---

The internal structure of the Deep Lounge system is entirely made of Plastitex, patented fireproof eco-friendly material which its weight is lower than 70% compared to the traditional stems.

It is upholstered with polyurethane rubber, variable density and resinated in order to confer great comfort to the sofa and the armchair.

The coating can be made in all colors and coatings and can be chosen on the Quinti Colours System Swatch card.

## Legs finishes

---

There are three types of structures characterizing the armchair:

1. 4 spoke white painted or polished aluminium Base on feet
2. 4 metal white painted legs Base
3. 4 wooden natural or tempered oak legs

There are two types of structures supporting the sofa:


1. 4 metal white painted legs
2. 4 natural or tempered oak legs

**CERTIFIED 11M**



## DEEP LOUNGE DesignArchirivolto

### DIMENSIONS

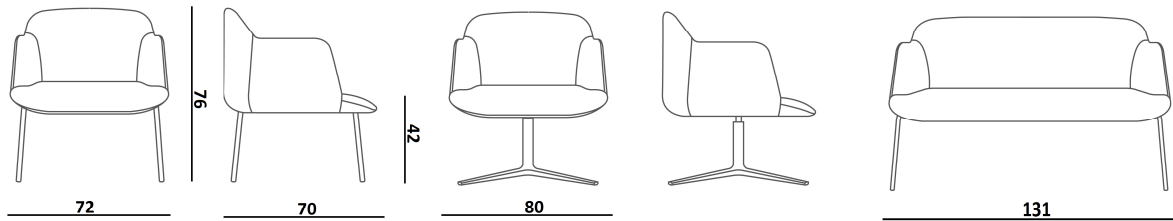

### COATINGS

---

#### BIO-EXPO

##### CATEGORY 2

300 gr/mt2  
100% Propitex FR batteriosattico  
Classe 1UNI EN ISO 354:2003  
100.000 +/- 10% cicli Maltindale

#### EXTREME

##### CATEGORIA 2

350 gr/mtl  
100% Xtreme FR  
Classe , EN 1021-1/2  
100.000 +/- 10% cicli Maltindale

#### LASER

##### CATEGORY 2

560 gr/mtl  
100% Poliestere FR  
Classe 1  
80.000+/- 10% cicli Maltindale

#### ECOPELLE

##### CATEGORY 2

630 gr/mt2  
83% PVC, 17% Syntetic  
ISO 379-DIN75200-CSERF4/83 10%  
cicli Maltindale

#### ERA

##### CATEGORY 3

448 gr/mtl  
100% Trevira CS  
Classe 1UNI EN ISO 354:2003  
100.000 +/- 10% cicli Maltindale

#### LASER PLUS

##### CATEGORY 3

630 gr/mtl  
100% Poliestere FR Trevira  
Classe1 , 4.000 +/- cicli Maltindale

#### ECOPELLE SOUL

##### CATEGORY 3

760 gr/mt2  
Superficie 100% POLIURETANO,  
Base Poliestere 85%,17% Cotone  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

#### MELANGE

##### CATEGORY 3

390 g/lin.m  
100% Trevira CS  
Classe 1  
80.000 +/- 10% cicli Maltindale

#### JET

##### CATEGORY 3

365+/- 5% g/lin.m  
100% Poliestere FR  
Classe 1  
80.000+/- 10% cicli Maltindale

#### ECOPELLE SISTEMA PRO

##### CATEGORIA 3

710 gr/mt2  
Superficie 93% PVC  
Base Poliestere 28%  
CLASSE1  
100.000 CICLI

#### LANA

##### CATEGORY 5

500 gr/mt2  
75% Lana, 25% poliammide  
Classe 1  
100.000 cicli Maltindale

#### PELLE

##### CATEGORY 5/6

620 g/lin.m  
100% Pelle bovina  
Classe 1, EN 1021-1/2

#### PIED POULE

##### CATEGORY 6

550 g/lin.m  
66% cotone, 34% Poliestere  
35.000 % cicli Maltindale

#### EUROPOST 2

##### CATEGORY 6

710 g/lin.m  
63% PU, 16% CO, 21% PL  
Ini1975 CLASSE1emme,UNI9175/FA  
50.000% cicli Maltindale

#### MERIT

##### CATEGORY 7

500g/lin.m  
76% Poliestere Recycled  
24% Poliestere  
EN 1021-1/2  
85.000 % cicli Maltindale

#### PREMIUM /ELEGANCE

##### CATEGORY 7

100% Pelle bovina Primo fiore  
Spessore 1,2/1,4 mm  
EN1021-1/2

#### STEELCUT TRIO

##### CATEGORY 7

770 g/lin.m  
90% New woolworsted, 10% Nylon  
Classe 1, EN 1021-1/2  
100.000 % cicli Maltindale

#### REMIX

##### CATEGORY 7

415 g/lin.m  
90% New woolworsted, 10% Nylon  
Classe 1, EN 1021-1/2  
100.000 % cicli Maltindale

#### VELLUTO DECONTRACTE'

##### CATEGORY 7

590 g/lin.m  
19% CO, 61% PC,10% PL, 10%VI  
40.000 % cicli Maltindale

#### VELLUTO

##### CATEGORY 8

600 g/lin.m  
100.000 % PL Flameretardant

#### PELLE SOFT

##### CATEGORY 8

100% Pelle bovina SPESSORE1,8-2 mm  
Primo fiore CONCIA ALL'ANILINA  
EN1021-1/2

### USAGE AND CARE

---

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

#### FABRICS

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

#### LEATHERS

Cleaning: clean with a wet white cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore it is recommended to pay particular attention while using.

#### WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

#### METALS

Cleaning: both steel or aluminium surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.