


GEJST

LIRIS **Pendant lamp**

by Kasper Friis Egelund & Thalea Schmalenberg

Instruction

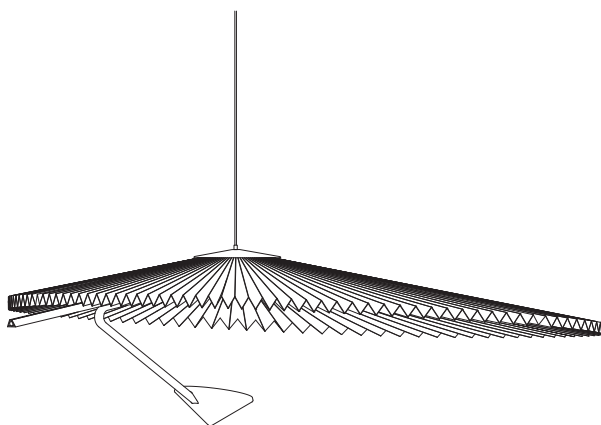

GEJST

CARE & MAINTENANCE


Read before installation

- IMPORTANT - Before installation you must disconnect the main cable from the power supply - remove fuse or turn switch to "OFF".
- Before drilling holes, check the walls for any cables to prevent damage.
- The installation must be performed in accordance with the local safety regulations.
- Before usage, refer to the provided manual. The manual contain the needed instructions to assemble the lamp. An incorrect assembly can result in damaging the parts, the circuit and reducing the lamp's lifespan.
- Do not place any object on the lamp if they are not delivered with the lamp.
- Ensure that the power supply is OFF before cleaning the product. Use a dust broom to clean the lamp.
- Use the following white cotton gloves to avoid greasy fingerprints at the lamp.
- The lamp gets hot when it is on. Allow the lamp to cool down before touching or cleaning.
- This information is a general guideline. Please contact us for specific maintenance instructions.
- If a part is damaged, it shall be replaced by the manufacturer or his service agent or a qualified person in order to avoid a hazard.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.


GEJST

Content of the box


A

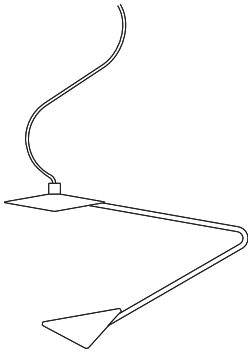

B



C

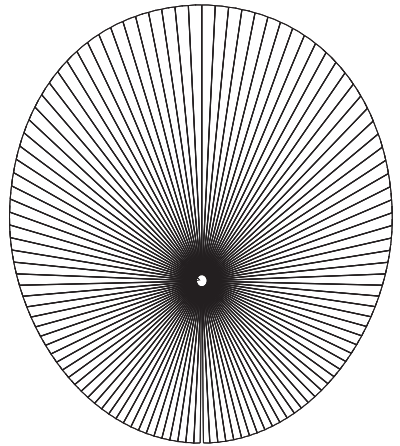


D



E



F



G




H



I




J




NOTE: USE THE WHITE GLOVES

GEJST

- ① Grab the fan holder (Part B) with one hand and the lampshade (Part C) with your other hand. Slide the fan holder (Part B) onto the stitching on the smooth side of the lampshade (Part C).

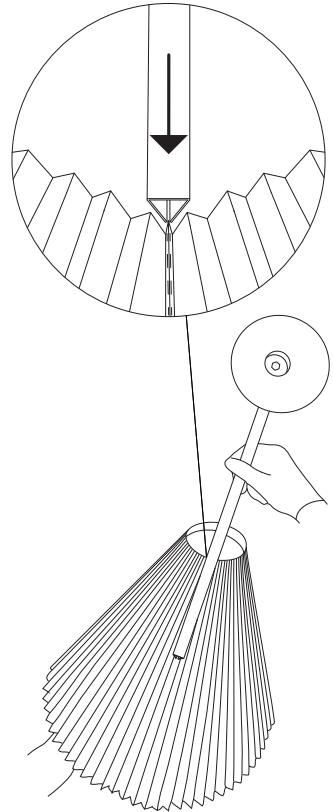


- ② Slide the fan holder (Part B) all the way down on the stitching track.

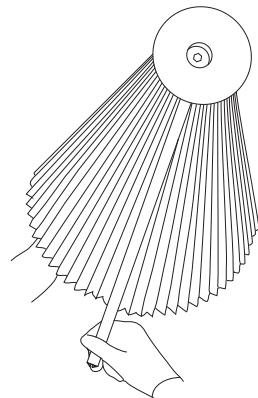



GEJST

- ③ Place the fan holder (Part B) with the attached lampshade (Part C) on a table, with the flat side of the fan holder facing downwards.

NOTE: Cover the table with a soft blanket to prevent the parts from getting scratched.

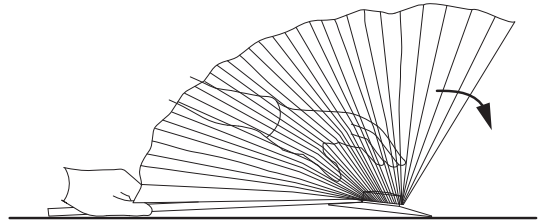


- ④ Hold the fan holder (Part B) and lampshade (Part C) with your one hand. Press the lampshade flat on the table with your other hand.

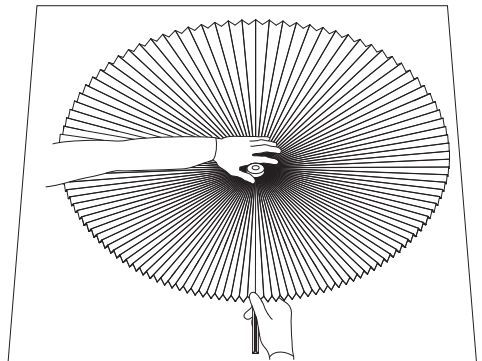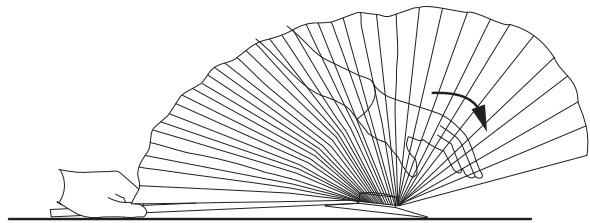


GEJST

- ⑤ Screw the top cover (Part F) onto the fan holder (Part B).

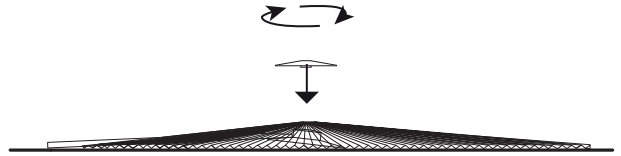


- ⑥ Grab the fan holder (Part B) with your one hand and use your palm of the other hand to fasten the top cover firmly (Part F).

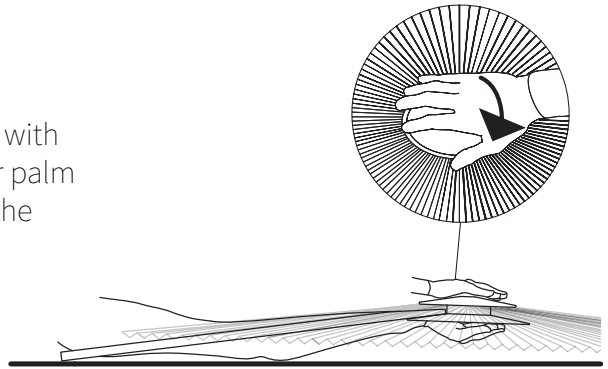


NOTE: Take care not to force the tightening operation

- ⑦ Slide the assembled fan parts onto the cable.

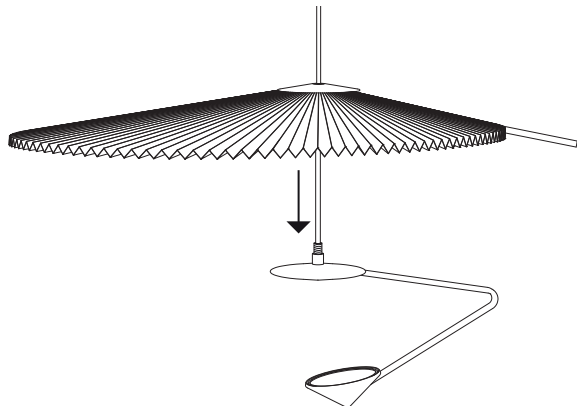


GEJST

- ⑧ Slide the top screw (Part H) onto the cable, and fasten by turning it clockwise on the fan holder (part B). Make sure the fan holder (part B) is aligned with the lamp holder (Part A).

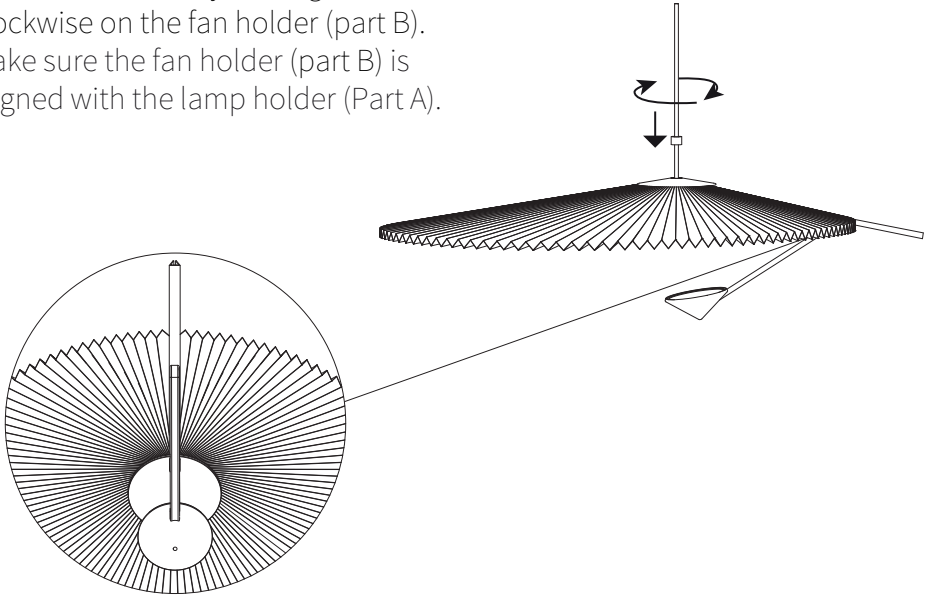


- ⑨ Pull the lamp cable through the canopy (Part J).

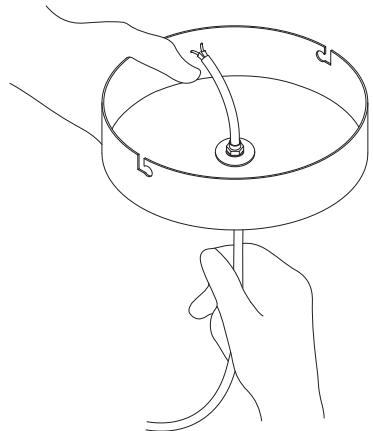

GEJST


- ⑩ Connect the wire ends from the lamp cable to the cable connectors on the driver (Part I). Match the brown wire (18V +) with “+” and the blue wire (18V -) with “-”.

Insert the wire ends while pressing down on the button with a screwdriver. Release the screwdriver and make sure the wire is attached correctly.

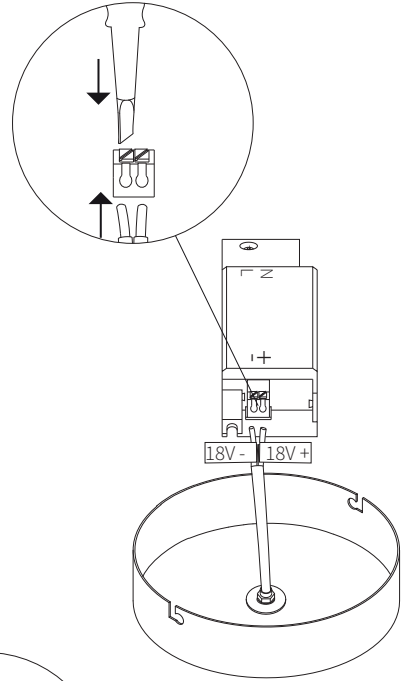


- ⑪ Connect the wire ends from the power cable to the cable connectors on the driver (Part I). Match the brown wire with “L” and the blue wire with “N”.

Insert the wire ends while pressing down on the button with a screwdriver. Release the screwdriver and make sure the wire is attached correctly.

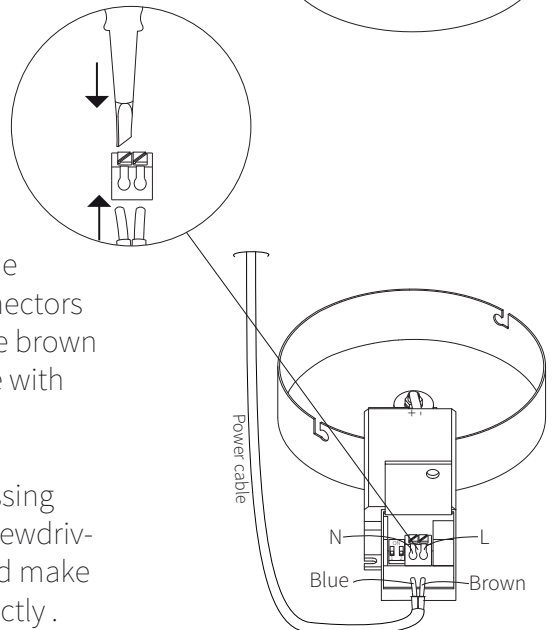


GEJST


- ⑫ Secure the power cable by closing the cover with the screw (Part I).

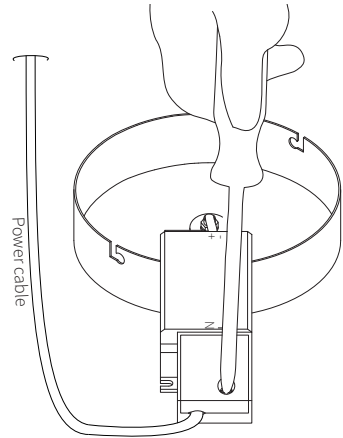

- ⑬ Place the driver (Part I) in the canopy (Part J) as shown in the illustration.

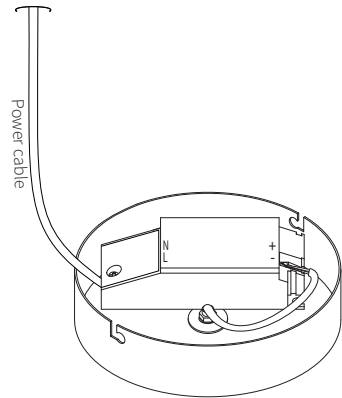


- ⑭ Secure the height by tightening the screw.

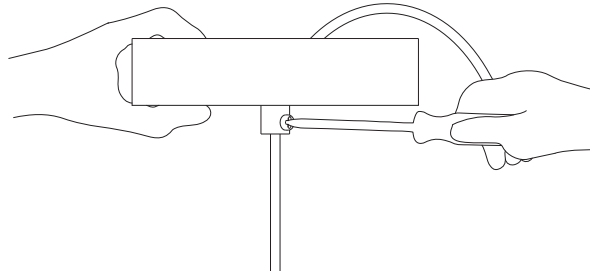


GEJST

- ⑮ Mount the bracket to the ceiling with screws (Part E).


Make sure to use suitable screws and plugs that fits the type of wall.




- ⑯ Place the canopy on the bracket and twist it.



- ⑰ The screws must align as shown.



- ⑱ Fasten the screws.

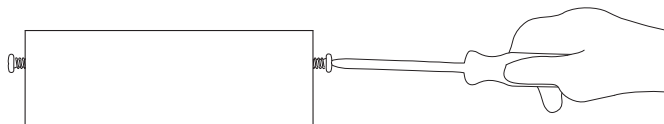

- ⑲ You can use one or two of the rods (Part G) to adjust the angle of the lamp.

