


The shelves must be installed into the grips

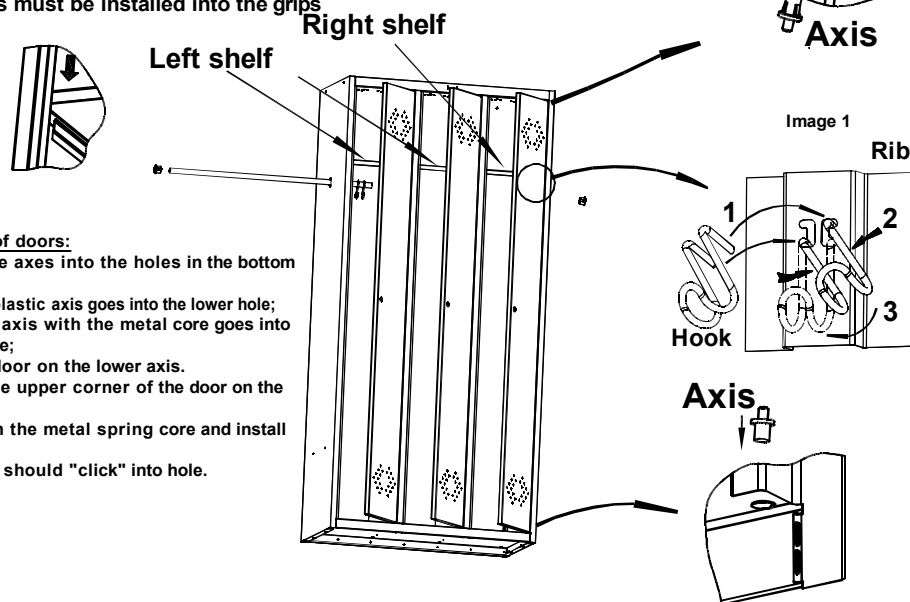

Assembling of doors:

1. Install the axes into the holes in the bottom and the roof:
 - common plastic axis goes into the lower hole;
 - springed axis with the metal core goes into the upper hole;
2. Put the door on the lower axis.
3. Install the upper corner of the door on the upper axis, put down the metal spring core and install the door. The axis should "click" into hole.

Note. Before installing the door, please make sure that the axis goes freely into the holes, if necessary, clean the holes from the paint.

Attention! If there's a vertical "play" of the door, it's necessary to remove it by putting an adjusting washer (included in the delivery set) under the axis.

Installation of hooks:

1. Install the hook according to image 1
2. Squeeze the hook (see image 1)
3. Turn the hook down, so that the right and the left bendings are parallel

6 While installing the tube, the S-formed hooks must be installed inside the locker. Each cell has 2 hooks.

Notes to instruction

1. The assembly operations order is indicated the order number in the lower left corner of each image.
2. Type and quantity of fixing materials and parts for main assembling operations is indicated in the upper left corner of the image.



Recommendations for use of the locker

1. The locker should be assembled on an even surface.

Notes

1. There may be construction changes not considered in this instruction manual.

Assembly instruction of locker LS-31

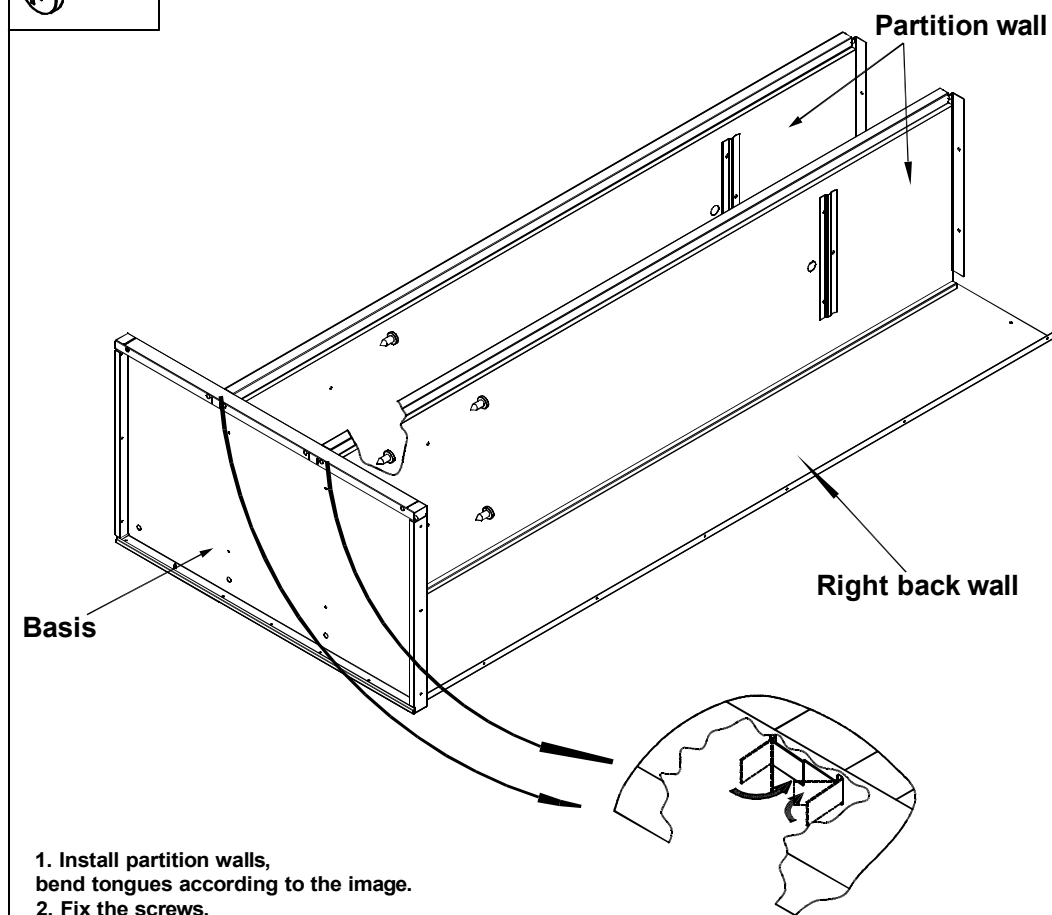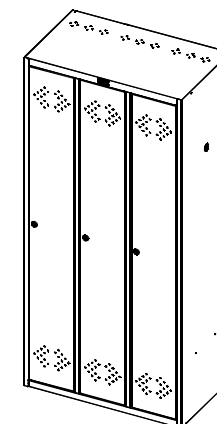

1. Install partition walls, bend tongues according to the image.
2. Fix the screws.

