

MEGA is a seat system featured with a contemporary design and limitless compositive ways.

Moduls are provided with metal legs and beam.

The chance to insert wood plans and metal coffee tables give maximum functionality and versatility.




MEGA may be limitless combined and made out of:

1. Straightforward seat element with or without backrest
2. A 90° curved element with or without backrests
3. A 45 ° curved element without backrests (available with the backrest only on the straight part)
4. Support surface element in natural oak wood.
5. Support surface in painted steel, which has to be anchored to the linear beam in the central part. Backrests can be assembled in both sides in the linear version.



DIMENSIONS

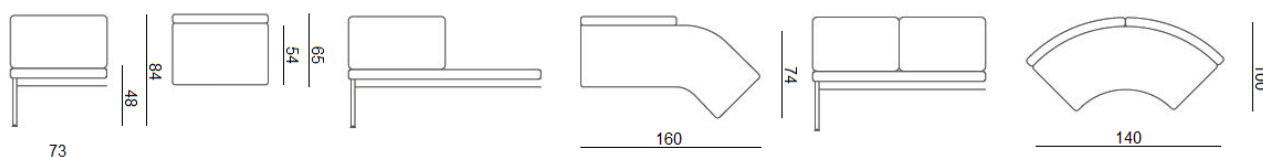

STRUCTURE

The MEGA system structure is entirely made out of white painted steel RAL 9003, anthracite 7016 coral RA3016.

Made up of a 80x40 beam, legs are created with a 30 diameter tubular and steel plate of 2mm of thickness and adjustable feet.

STRUCTURE AND FOAM

The seat cushion is made out of expanded polyurethanic and cushproof rubber with a density of 40 and 8cm of thickness, laid on wood support of 15 mm of thickness.

The backrests are made out of polyurethanic cold injected foam rubber with and steel.

Available even with fireproof castors Certified 1IM.

ACCESSORIES

- Coffee table in oak-veneered wood painted in temperate or natural which can be inserted in place of a seat.
With rounded angles and 25mm of thickness.
- Support surface in painted steel, which has to be anchored to the beam.



EXAMPLES OF MODULARITY



COATINGS

BIO-EXPO CATEGORY 2

300 gr/mt2
100% Propitex FR batteriosattico
Classe 1UNI EN ISO 354:2003
100.000 +/- 10% Maltindale rubs

EXTREME CATEGORY 2

350 gr/mtl
100% Xtreme FR
Classe , EN 1021-1/2
100.000 +/- 10% Maltindale rubs

LASER CATEGORY 2

560 gr/mtl
100% Poliestere FR
Classe 1
80.000+/- 10% Maltindale rubs

ECO-LEATHER CATEGORY 2

630 gr/mt2
83% PVC, 17% Syntetic
ISO 379-DIN75200-CSERF4/83 10%
Maltindale rubs

ERA CATEGORY 3

448 gr/mtl
100% Trevira CS
Classe 1UNI EN ISO 354:2003
100.000 +/- 10% Maltindale rubs

LASER PLUS CATEGORY 3

630 gr/mtl
100% Poliestere FR Trevira
Classe1 , 4.000 +/- Maltindale rubs

ECO-LEATHER SOUL CATEGORY 3

760 gr/mt2
Surface 100% POLIURETANO,
Base Poliestere 85%,17% cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE CATEGORY 3

390 g/lin.m
100% Trevira CS
Classe 1
80.000 +/- 10% Maltindale rubs

JET CATEGORY 3

365+/- 5% g/lin.m
100% Poliestere FR
Classe 1
80.000+/- 10% Maltindale rubs

ECO-LEATHER SYSTEM PRO CATEGORY 3

710 gr/mt2
Superficie 93% PVC
Base Poliestere 28%
CLASSE1
100.000 RUBS

WOOL CATEGORY 5

500 gr/mt2
75% wool, 25% poliammide
Classe 1
100.000 Maltindale rubs

LEATHER CATEGORY 5/6

620 g/lin.m
100% bovine leather
Classe 1, EN 1021-1/2

PIED POULE CATEGORY 6

550 g/lin.m
66% cotton, 34% Poliestere
35.000 % Maltindale rubs

EUROPOST 2 CATEGORY 6

710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASSE1emme,UNI9175/FA
50.000% Maltindale rubs

MERIT CATEGORY 7

500g/lin.m
76% Poliestere Recycled
24% Poliestere
EN 1021-1/2
85.000 % Maltindale rubs

PREMIUM /ELEGANCE CATEGORY 7

100% bovine leather Primo fiore
thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO CATEGORY 7

770 g/lin.m
90% New wool worsted, 10% Nylon
Classe 1, EN 1021-1/2
100.000 % Maltindale rubs

REMIX CATEGORY 7

415 g/lin.m
90% New wool worsted, 10% Nylon
Classe 1, EN 1021-1/2
100.000 % Maltindale rubs

DECONTRACTE' VELVET CATEGORY 7

590 g/lin.m
19% CO, 61% PC,10% PL, 10%VI
40.000 % Maltindale rubs

VELVET CATEGORY 8

600 g/lin.m
100.000 % PL Flame retardant

SOFT LEATHER CATEGORY 8

100% Bovine leather THICKNESS 1,8-2 mm
Primo fiore CONCIA ALL'ANILINA
EN1021-1/2

USE AND CARE

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

LEATHERS

Cleaning: clean with a wet white cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore it is recommended to pay particular attention while using.

WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

METALS

Cleaning: both steel or aluminium surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

WARRANTY

QUINTI products are covered by 5 years warranty from the delivery date, unless normal usage and provided that materials are used following the instructions. Quinti will substitute without costs each product found not corresponding to the warranty, declining all other responsibility. The warranty doesn't include components, external accessories or materials provided by the purchaser and applied to the products in order to personalize them..