

# TOP 530

Technical information



## Other documents available for this product

NARBUTAS product care guide

Screens, desks, and fittings compatibility guide

### Quality standard

LST EN ISO 354:2004

LST EN ISO 11654:1998 (Sound absorption class C)

EN 1023-1:1996

EN 1023-2:2000

EN 1023-3:2000

### 10 year Warranty


See Warranty statement



# Technical information

## Types

- Quadrangle acoustic side screen (1)
- Chamfered acoustic side screen (2)
- Acoustic front screen (3)
- Height adjustable acoustic front screen (4)
- Acoustic front screen for NOVA 2-desk bench (5)
- Quadrangle acoustic divider screen for NOVA 4-desk bench or single row 2-desk bench (6)
- Chamfered acoustic divider screen for NOVA 4-desk bench or single row 2-desk bench (7)
- Acoustic front screen for NOVA end desk bench (8)
- Acoustic front screen for MOTION bench desk (9)
- Acoustic front screen for B-ACTIVE bench desk (10)



## Screen

- 16 mm chipboard;
- 10 mm acoustic foam on both sides of the chipboard;
- Upholstered with fabric.

## Screen fittings

### Clamp fittings (1)

- 4 mm metal sheet;
- Powder coated metal;
- PA plastic knob (black only);
- Suitable for desktops with a thickness ranging from 14-27 mm;
- Attached to the screen using screws.

### Fixed-height fittings (2)

- 2 mm metal sheet;
- Powder coated metal;
- Fittings are attached to the screen using wood screws.

### Height adjustable fittings (3)

- 4 mm metal sheet;
- Powder coated metal;
- Attached to the desktop using wood screws.
- Screen height adjustable from 0 to 500 mm above the desktop by tightening two screws.

### Fittings for NOVA bench desk (4)

- 4 mm metal sheet;
- Powder coated metal;
- Attached to the desktop using wood screws.

### Fittings for NOVA bench divider (5)

- 4 mm metal sheet;
- Powder coated metal;
- Suitable for desktops with a thickness of 25 mm.
- Attached to the desktop using wood screws.

### Fittings for MOTION bench desk (6)


- 4 mm metal sheet;
- Powder coated metal;
- Attached to the desk frame using screws.

### Fittings for B-ACTIVE bench desk (7)


- 4 mm metal sheet;
- Powder coated metal;
- Attached to the desk frame using screws.

# Range


## Side screens

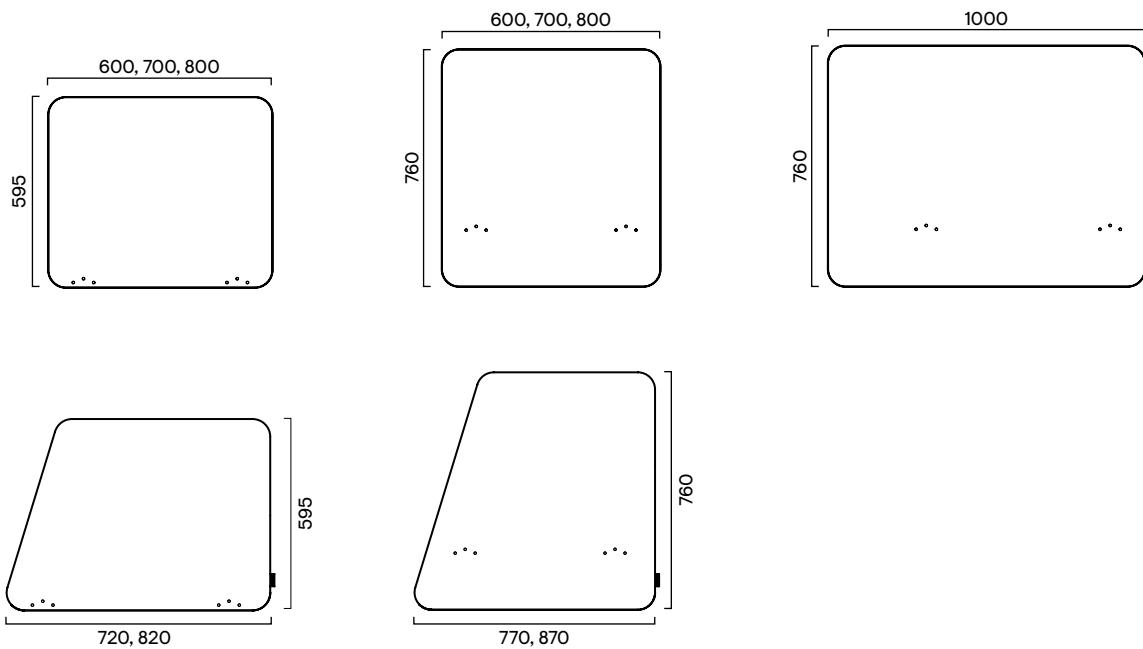


## Front screens

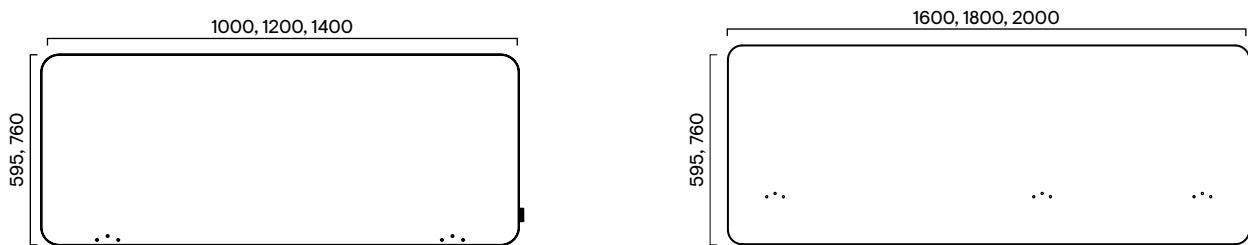


## Height adjustable front screen

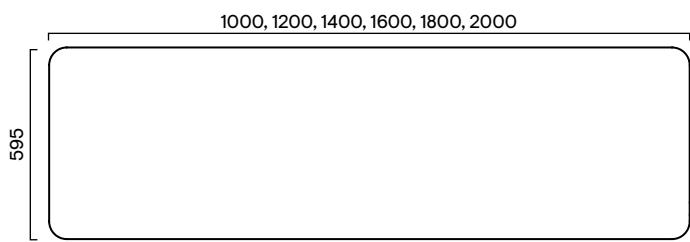


MOTION bench front screen

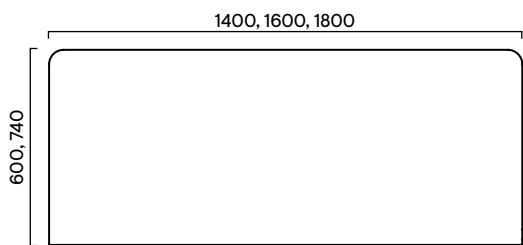


B-ACTIVE bench front screen

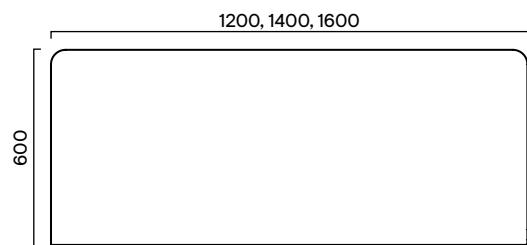



NOVA bench screen

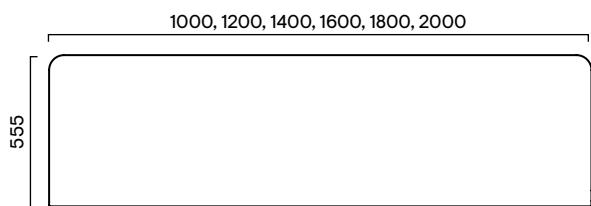


NOVA bench divider screen

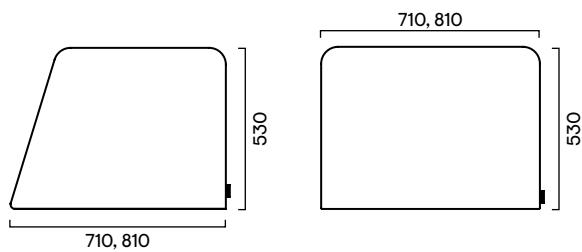


NOVA end desk bench screen

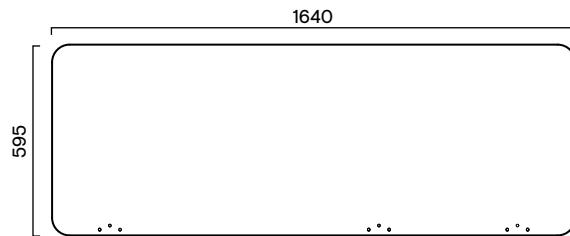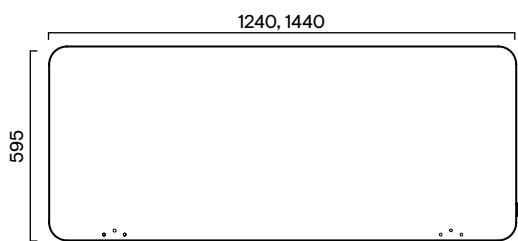


## Clamp fittings

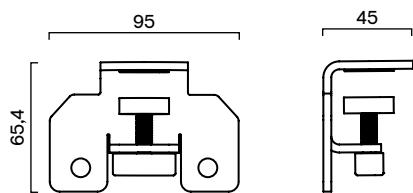


## Fixed height fittings




## Height adjustable fittings

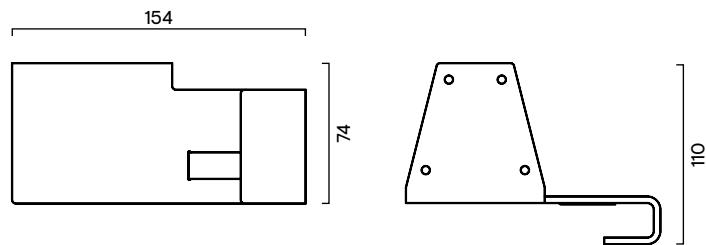


## NOVA bench front screen and divider screen fittings

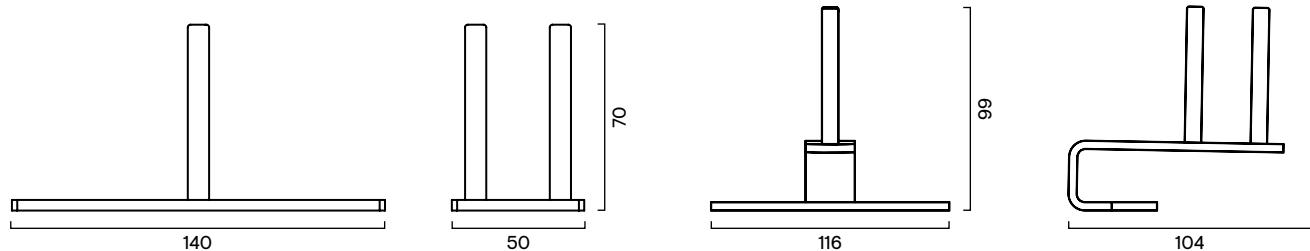

## MOTION 2-desk bench screen fittings

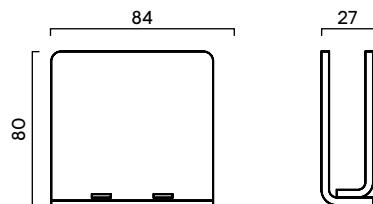

## B-ACTIVE 2-desk bench screen fittings

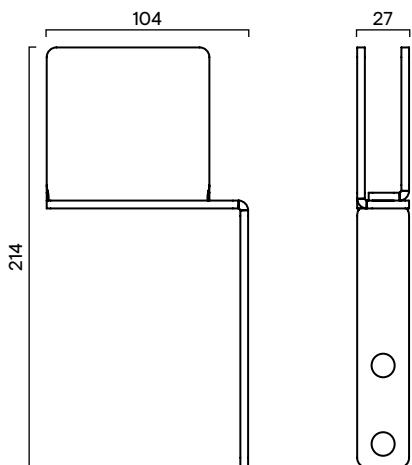

---

## Additional information

- Screen fittings must be ordered separately based on specific requirements.
- When ordering a screen for the MOTION 2-desk bench without ordering a central cable tray (G9A0014, G9A0015 or G9A0016), metal fittings G4F0024 must be ordered.
- The 1000 mm quadrangle side screen and chamfered side screens should be ordered based on their placement side – left (L/H) or right (R/H).
- Screens can be pinned using pins.
- If unsure about screen compatibility with desk systems, refer to the compatibility table for detailed information on suitable screens and required fittings.